
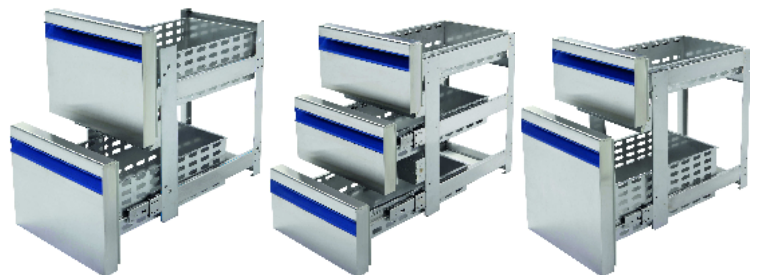


AfG Kühlische Serie Plus

Technisches Datenblatt

DKT2-S DKT2C2-S DKT2C4-S

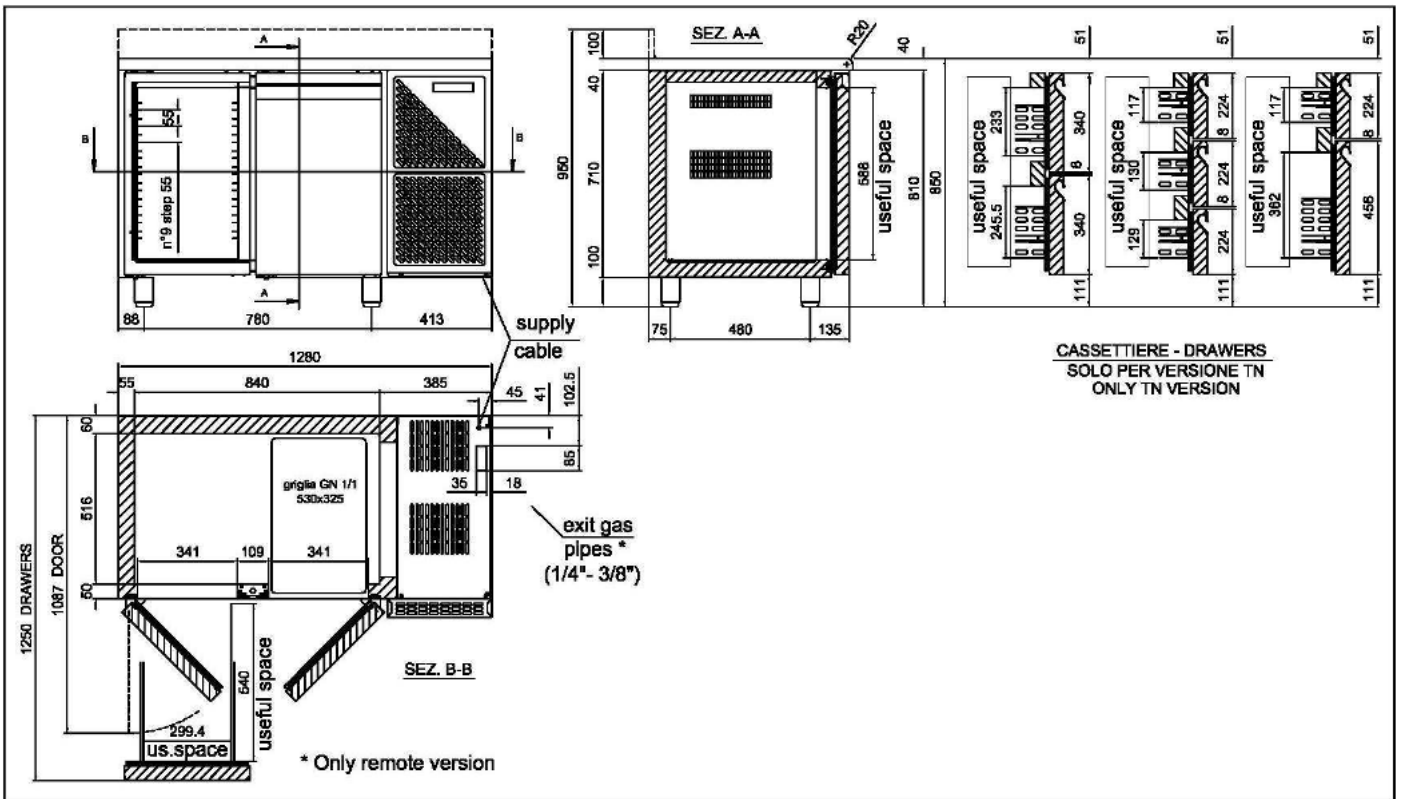

Descrizione

Tavolo refrigerato realizzato in acciaio inox con pianale in AISI 304. Refrigerazione ventilata con monoblocco dalla semplice manutenzione, sbrinamento automatico ad evaporazione dell'acqua di condensa. Monoscocca a cielo aperto con coibentazione in poliuretano iniettato ad alta pressione senza CFC o HCFC spessore 60mm. Angoli interni arrotondati per favorire una pulizia ottimale. Guide porta griglie estraibili e regolabili in altezza in 9 diverse posizioni. Porte a chiusura automatica con posizione di folle a 100° di apertura, apertura reversibile verso destra o sinistra, guarnizione magnetica asportabile per pulizia. Piedini in acciaio inox regolabili in altezza, la fornitura standard prevede 1 coppia di guide a "U" antiribaltamento ed 1 griglia plastificata GN 1/1 (530x325) per ogni porta.

Optionals

Sono disponibili i seguenti optionals: Kit ruote (2con freno, 2senza freno), Coppia guide inox a "L" per tavoli 700, griglie GN 1/1 (530x325) in acciaio inox, cavo spina fuori standard, luce LED verticale, unità remota.

Description

Refrigerated counter manufactured in stainless steel with a AISI 304 counter top. Ventilated refrigeration with easy maintenance single block, automatic defrosting and condensate evaporation. Single closed-top frame with polyurethane insulation injected at high pressure without CFC or HCFC measuring 60mm thick. Rounded internal corners to enable excellent cleaning. Removable and height adjustable grid support guides in 9 different positions. Automatic closing doors with idle positioning 100° open, reversible opening from right to left, magnetic gasket can be removed for cleaning. Height adjustable stainless steel feet, with standard provision including 1 pair of "U" guides to prevent tipping over and 1 plastic coated grid GN 1/1 (530x325) for each door.

Optionals

The following optionals are available: Set of 4 castors (2 with break, 2 without break), S/s couple of runners "L" for table 700, stainless steel grids GN 1/1 (mm 530x325), non standard cable with plug, side LED light, remote unit.

Technische Daten

Mod	Capacità di carico / Load capacity	Capacità camera / Capacity	Temp.	Assorb elettrico / Absorption	Alim. elettr / voltage	Potenza frigor / Power	Temp. Amb. / Ambient temp	Gas refrig.	Peso netto / Net weight	Peso lordo / Gross weight	Dim. mm			Dim imb / Packing mm		
	№	L	°C	W	V / Hz	W	°C / RH		kg	kg	L W	P D	H H	L W	P D	H H
DKT2C4-S	18 GN 1/1 530X325	300	0 / +10	316	230-1+N / 50-60	290	+40-42 / 65	R134a	108	122	1280	700	850 ÷ 900	1320	730	1100

Dati tecnici / Technical details - Motore remoto / Remote unit :

Mod	Capacità di carico / Load capacity	Capacità camera / Capacity	Temp. °C	Assorb elettrico / Absorption	Alim. elettr / voltage	Potenza frigor / Power	Temp. Amb. / Ambient temp	Gas refrig.	Peso netto / Net weight	Peso lordo / Gross weight	Dim. mm			Dim imb / Packing mm			
	№	L									W	V / Hz	W	°C / RH	kg	kg	L W
PCT702MR	18 GN 1/1 530x325	300	0 / +10	53	230-1+N / 50-60	290 Tcd=+45°C Te= -10°C	+40-42 / 65	R134a	88	102	1280	700	850 ÷ 900	1320	730	1100	
PCT702ALMR									90	104							950 ÷ 1000
PCT702SPMR									60	74							810 ÷ 860
PCT702BTMR			-18 / -22			90			104	850 ÷ 900							
PCT702BTALMR						92			106	950 ÷ 1000							
PCT702BTSPMR						62			76	810 ÷ 860							

Rev 00